

YUAN

PD5A0 SDI

User Manual

TABLE OF CONTENTS


1. PRODUCT INTRODUCTION.....	3
1.1. PRODUCT BRIEF	3
1.2. SPECIFICATION.....	3
2. HARDWARE INSTALLATION.....	4
2.1. PACKAGE CONTENTS	4
2.2. CONNECTION DIAGRAM.....	4
2.3. PRECAUTION.....	4
2.4. USB 2.0 DONGLE	4
3. SOFTWARE INSTALLATION (STANDARD DEVICE).....	5
3.1. SUPPORT OS.....	5
3.2. DRIVER INSTALLATION.....	5

1. PRODUCT INTRODUCTION

1.1. Product Brief

PD5A0 SDI is a high-quality, high-performance capture device which is specially designed for high-definition video capture applications. It supports up to 1 channel of high-definition, 1080p30 video from 1 x SDI video source and 1 x SDI embedded audio source. With hardware support, PD5A0 SDI can record live video from high-definition signal sources into H.264 files via USB 2.0.

1.2. Specification

Model	PD5A0 SDI
Max. FPS	1920x1080p @60/50fps in → 1920x1080p @30/25fps out
Recording Mode	Hardware Compression, Real-Time Mode
Product photo	
Dimension	L:29.4mm x W:65.7mm x H:14mm
Interface	USB 2.0
Video Input	1 x SDI
Display Video Format	YV12,NV12,YUY2,RGB24,RGB32
Recording Video Format	H.264 (Hardware Compression)
Recording Video Resolution	HD-SDI 1920x1080p @30/25/24fps 1920x1080i @60/50fps 1280x720p @60/50fps SD-SDI 720x480i @60fps 720x576i @50fps
Audio Input	1 x SDI Embedded audio
Audio Format	Stereo / 16-bit / 32000 ~ 48000Hz
Multiple Cards	∞
SDK	VC++ / C# / .NET / VB / V4L2


2. HARDWARE INSTALLATION

2.1. Package Contents

Item	Amount
PD5A0 SDI	1
USB cable	1(Optional)


2.2. Connection Diagram

Figure below is the connection diagram for supported signal and interface.

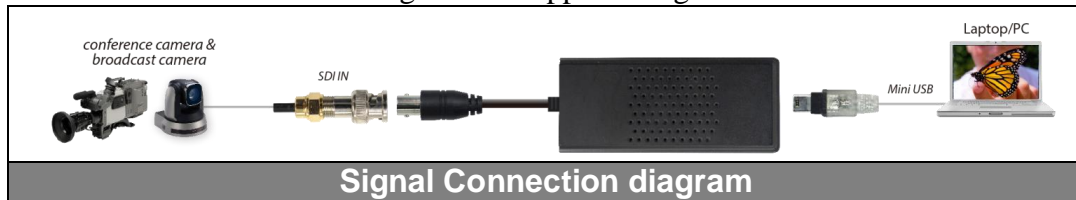

2.3. Precaution


Before proceed, make sure touch a safely grounded object or metal object before touching the device.

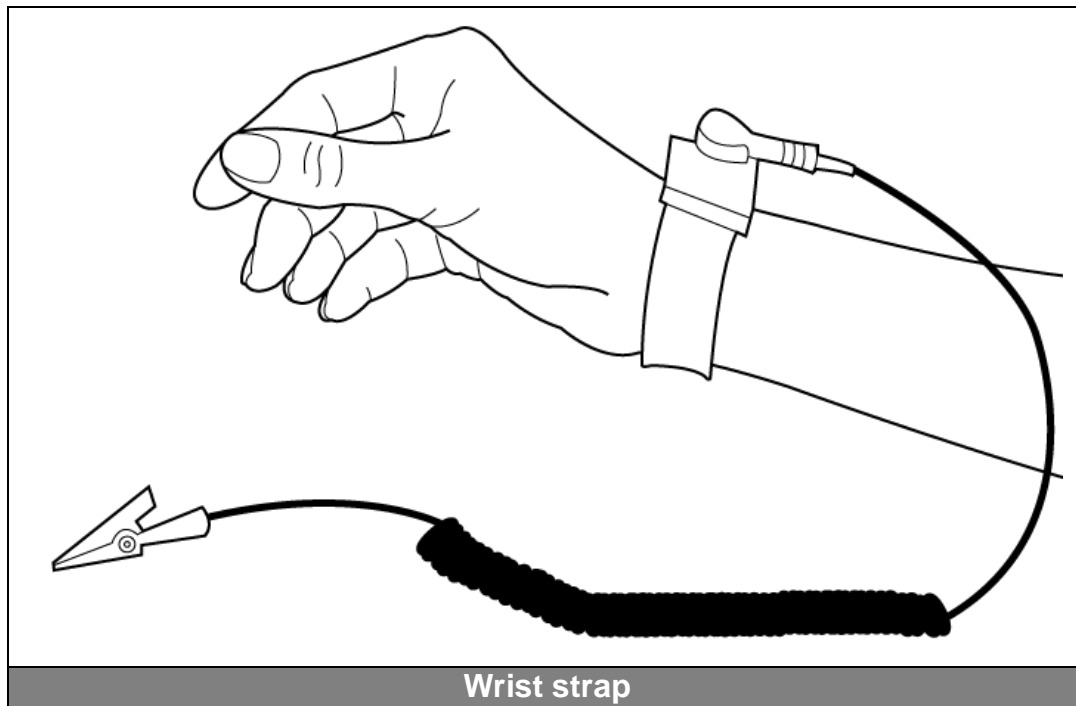

Please follow below chapter for installation operations

2.4. USB 2.0 Dongle

- Connect USB2.0 cable to PC/Laptop

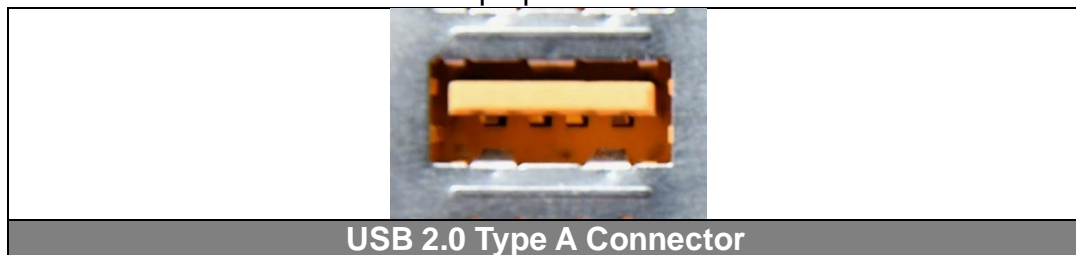

- Connect signal source

3. SOFTWARE INSTALLATION (Standard device)

3.1. Support OS

Windows based system	Windows XP	Support
	Windows Vista	Support
	Windows 7	Support
	Windows 8/8.1	Support
	Windows 10	Support
Linux based system	Linux 2.6.14 or Higher	Support

3.2. Driver Installation

After install the device and reboot the PC/notebook, the “Windows Found New Hardware Wizard” will appear and detect the device. Please click “Cancel” to exit the Wizard, and implement installation program to install the device driver and application.

- Please click on the driver and follow the instruction to start the installation.
- While the installation is completed, user may check the device driver is installed correctly by following steps
 - Start
 - Control Panel
 - System
 - Device Manager
 - And user can find device from the device manager dialog (see below figure, device number will different by channel numbers).

